

BOSS[®]
AUDIO SYSTEMS

User's Manual

MC400

**MOTORCYCLE/UTV SPEAKER
AND AMPLIFIER SYSTEM**



MC400

**MOTORCYCLE/UTV SPEAKER
AND AMPLIFIER SYSTEM**

11.2011

BOSS[®]
AUDIO SYSTEMS

MC400 Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, and will afford you years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MC400 Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	-----10~16V
Max Power	-----600W
THD	-----<0.1%
S/N	----->50dB
Channel Separation	----->50dB
Frequency Response	-----20Hz-20kHz
Sensitivity	-----150mv


Features:

Weatherproof, High Power Speakers


- High-Impact, Hi-temp ABS Exterior
- Stainless Steel brackets
- Weatherproof Wired Remote Volume Control
- Left/Right Audio Input Jack

MC400 Motorcycle/UTV Amplified Speaker System

Connections

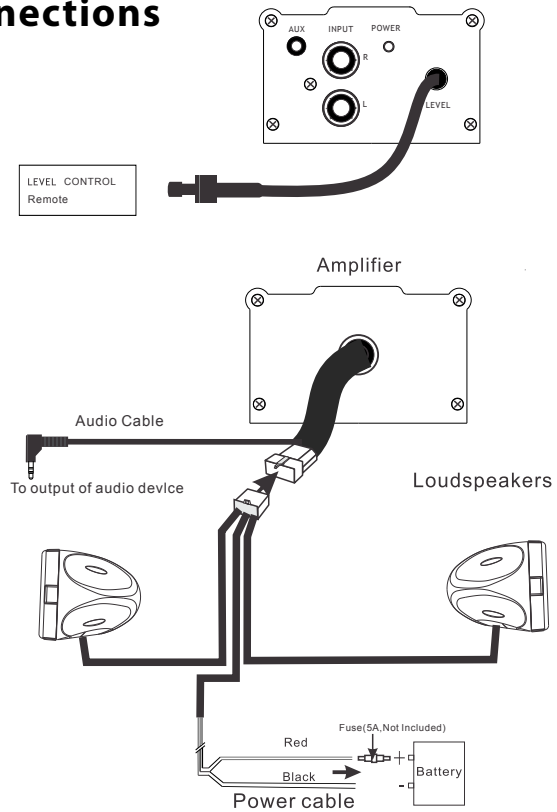

Loudspeaker Mounting Diagram



MC400 Motorcycle/UTV Amplified Speaker System

Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 5A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.