

General	
Shape	Free form / Square
Seating Capacity	7
Shell Material	Ultralife™ / Geloy®
Dimensions	91¾" x 91¾" x 40" H / (233cm X 233cm x 102cm H)
Corner Radii	22" (56 cm)
Water Capacity	375 Gallons (1420 Liters)
Dry Weight	1100 lbs (499 kg)
Shipping Weight	Domestic 1100 lbs (499 kg) - Export 1150lbs (531 kg)
Full Weight	4225 lbs (1917 kg)
Skirt Material	Synthetic
Poly Floor	Yes



Water System	
Water Treatment System	Ultra Pure™
Plumbing Systems	5
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	6
VCR Jet® - Air Adjustable/Directional	2
VCR Jet® - Rotator	6
VCR Jet® - Dual Rotator	0
VCR Jet® - Multi Port Spinner	0
VCR Jet® - Mini Rotator	22
VCR Jet® - Mini Directional	4
VCR Jet® - Euro Directional	12
VCR Jet® - Euro Rotator	14
VCR Jet® - Mini Directional in NFJ	8
Typhoon Jet	1
Ozone Jet	1
Heater Return Jet	1
Pump Returns	6
Diverter Valves	2
Floor Drains	1
Skimmer	8" Weir


Special Features	
Dynamic Massage Sequencer w/ control panel	Yes
NeckFlex® Jet Pillows	2
Headrest Pillows	4
Stereo system	Optional Advanced In.Tune
Water Feature	Yes
Water Feature Volume control	Yes
Cup Holders	4
Tactile Therapy	Floor pedestal
Under water magnetic switch	Yes
Air Control Valve	No

Pump Information	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	3.6 (2.0) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One / Dual & Two / Single	One / Dual & Two / Single
Circulation pump	1	1
Fountain pump	1	1


Electrical System	Domestic (60Hz)	Export (50Hz)
Voltage	240	240
Amperage	50/40	2X16 / 1X32 3X16
Heater	FastFlo 2.7, 4.0, 5.5 kW	FastFlo 3.3 kW 2.1, 5.2 kW
Thermostat	Electronic	Electronic
Light	2 Multi color LED	2 Multi color LED
Control System	MSPA-MP-D16	MSPA-MP-D14-CE
Upper Control (programmable)	M-Drive with Scrolling Message Center	M-Drive with Scrolling Message Center
Auxiliary Upper Control	No	No

Note: 1. Subject to change without notice.

Lotus Bay Architectural Specification

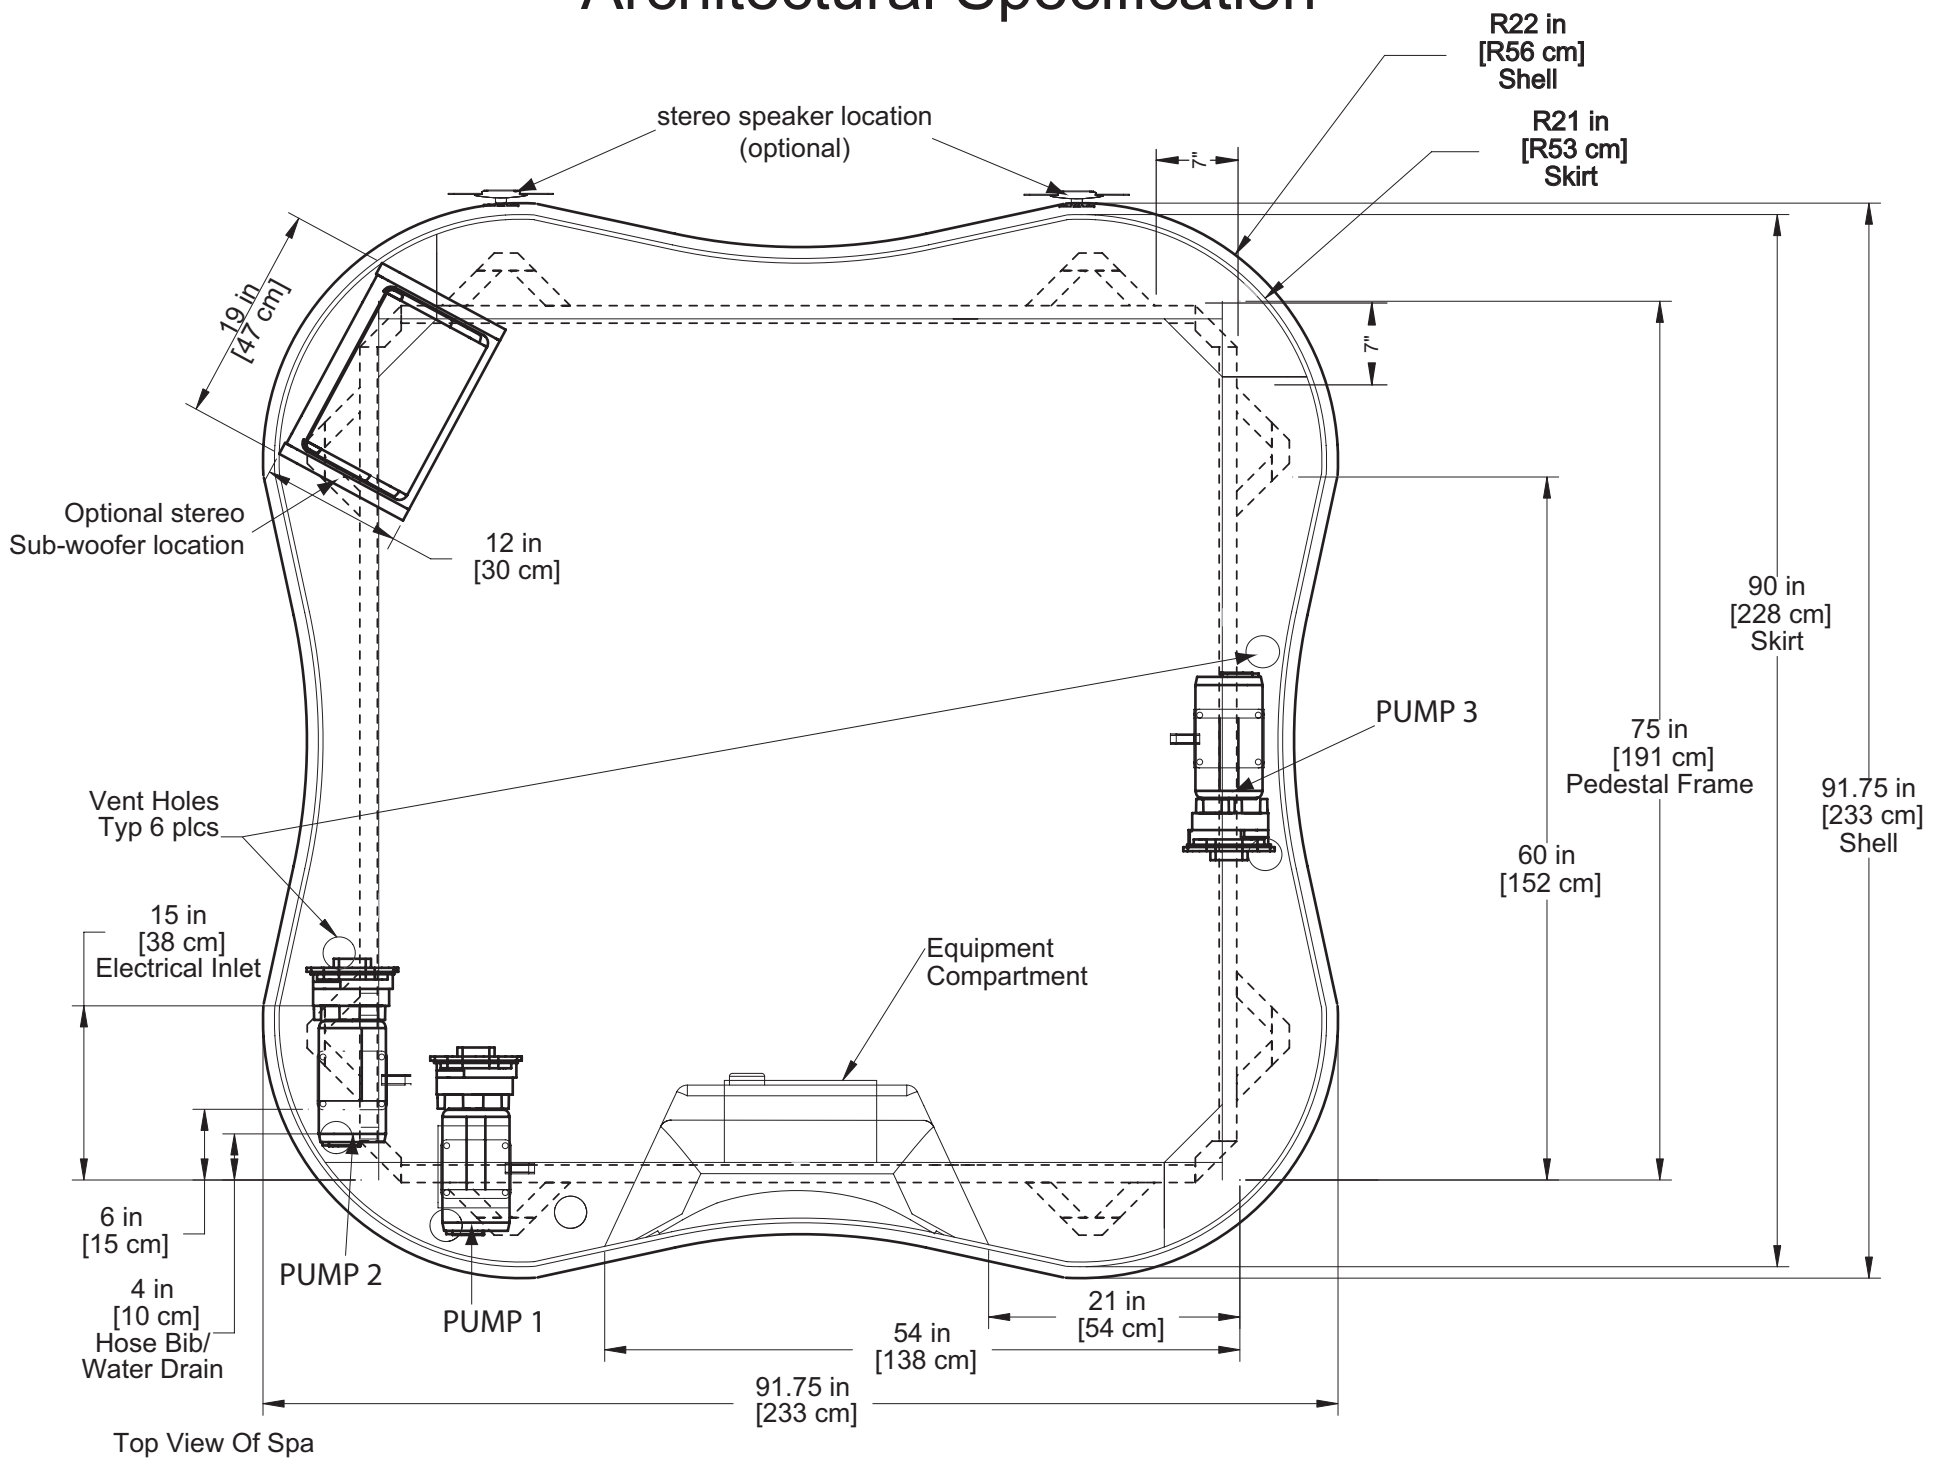

Top View Of Spa

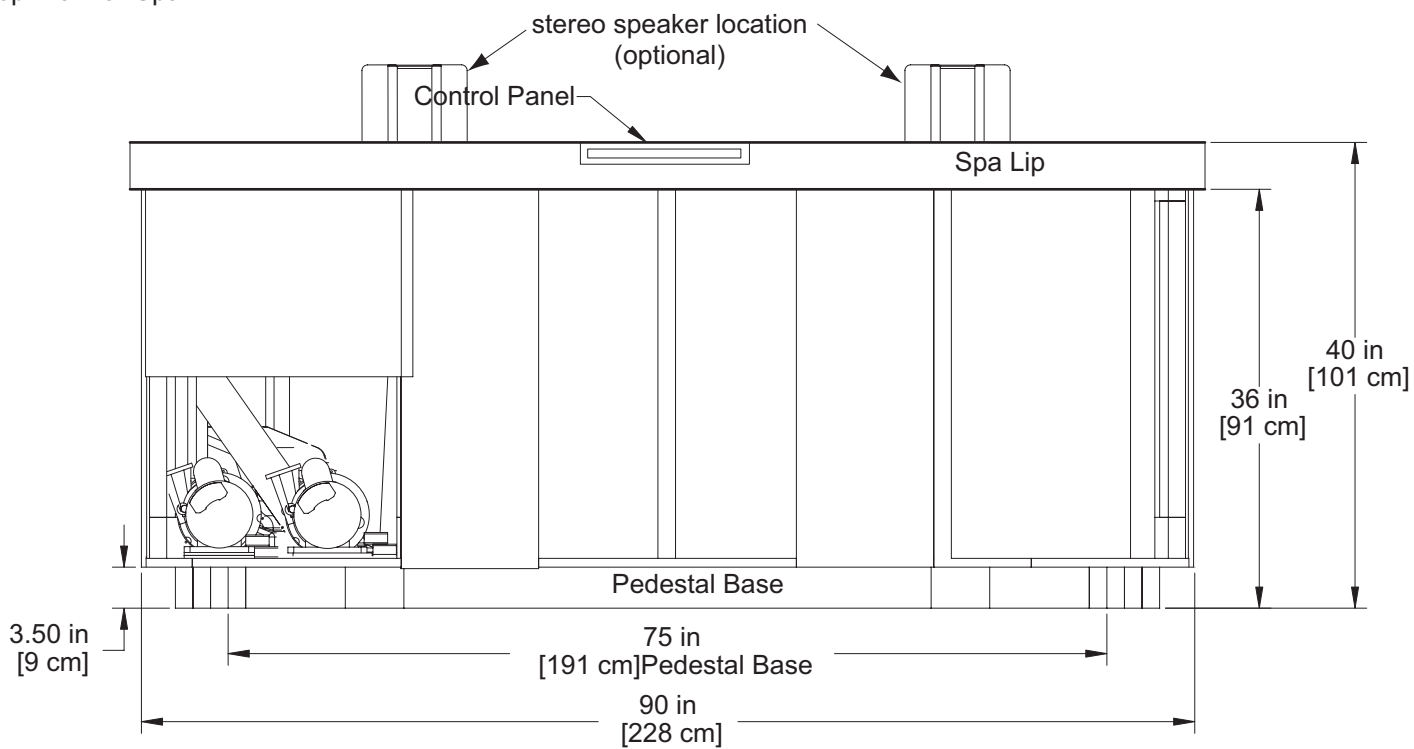

Front View Of Spa

Caution:
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

- Note:**
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" (45.72cm) clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details