


H61M-P21 (MS-7680v3.1) m-ATX Mainboard

Supports Intel® Sandy Bridge processor in the LGA1155 package

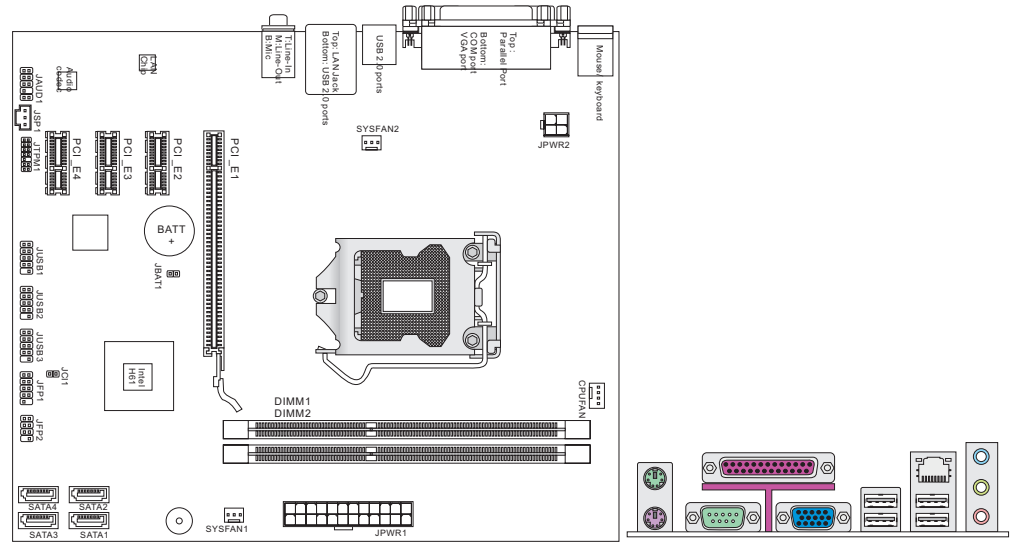

Mainboard Specification

<p>Processor Support</p> <ul style="list-style-type: none"> Intel® Sandy Bridge processor in the LGA1155 package <p>Chipset</p> <ul style="list-style-type: none"> Intel® H61 chipset <p>Memory Support</p> <ul style="list-style-type: none"> 2 DDR3 DIMMs support DDR3 1333/ 1066 SDRAM (total Max. 16GB) Supports Dual-Channel mode <p>LAN</p> <ul style="list-style-type: none"> Supports LAN 10/ 100 by Atheros/AR8152 <p>Audio</p> <ul style="list-style-type: none"> Chip integrated by VIA VT1708S Supports 7.1 channels audio out Compliant with Azalia 1.0 Spec <p>SATA</p> <ul style="list-style-type: none"> 4 SATA 3Gb/s ports by Intel® H61 	<p>Connectors</p> <ul style="list-style-type: none"> Back panel <ul style="list-style-type: none"> 1 PS/2 mouse port 1 PS/2 keyboard port 1 Parallel port 1 Serial port 1 VGA port 4 USB 2.0 ports 1 LAN jack 3 flexible audio jacks <p><small>* (The VGA port only work with Integrated Graphics Processor.) * (To reach the 7.1-channel sound effect, the 7th and 8th channels must be output from front panel.)</small></p> <p>Slots</p> <ul style="list-style-type: none"> 1 PCIe x16 slot 3 PCIe x1 slots <p>Form Factor</p> <ul style="list-style-type: none"> Micro-ATX (24.5 cm X 20.5 cm) <p>Feature on Focus</p> <ul style="list-style-type: none"> Half Solid Cap design M-Flash included USB Safeguard Heat sink design <p>Mounting</p> <ul style="list-style-type: none"> 6 mounting holes
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

These specification is subject to change without prior notice.