

plantronics®

**LEARN
MORE**

M100™ Bluetooth® Headset


TAKE A GOOD LOOK

CALL BUTTON

- Take a call or end it (1 tap)
- Redial (2 taps)
- Initiate phone's voice-dialing (2-second press until tone heard)
- Reconnect lost connection (1 tap)
- Activate pairing after initial set up (press until LED flashes red/blue)
- Activate multipoint (press while powering on)
- Transfer a call to/from headset (1-second press while on a call)

POWER SWITCH

- On (slide to reveal black)
- Off (slide to reveal red)

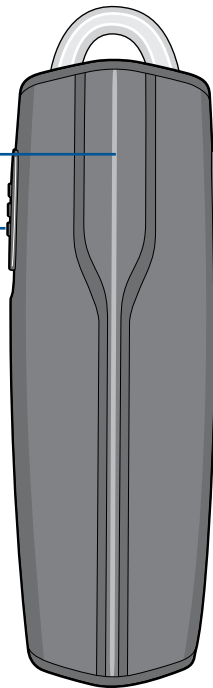

MICRO USB CHARGING PORT


- With AC charger:
 - 30 minutes (2 hours talk time)
 - 90 minutes (full charge)
- Best performance when fully charged

VOLUME/MUTE BUTTON

- Min-Lo-Med-Hi-Max (1 tap per level change)
- Mute: on/off (1-second press)


LED

- Charging (solid red)
- Fully charged (solid blue)
- Low battery (2 red flashes, 2 tones)
- Critically low (3 red flashes, 3 tones)
- Multipoint (on=2 blue flashes, and off=1 blue flash)

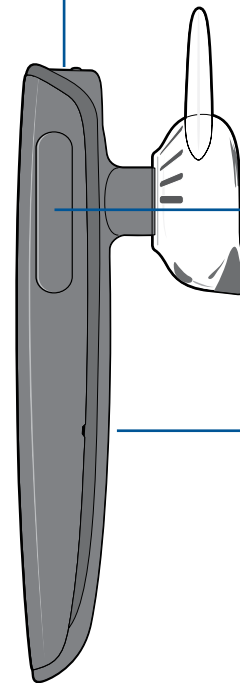

Be safe! Please read the safety guide for important safety, charging, battery and regulatory information before using your new headset.

CONNECT TO YOUR PHONE

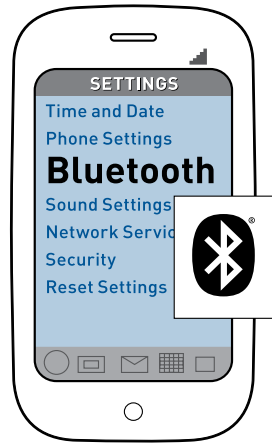

1. READY

Activate the Bluetooth feature on your phone, then use the phone's settings to add/search/discover new Bluetooth devices.

iPhone: Settings > General > Bluetooth>On
(starts the search for devices)

BlackBerry® smartphone:
Settings/options > Bluetooth:
On > Search for devices

VIDEO TUTORIAL

(in English only):

www.plantronics.com/pairing



2. SET

First time:


With headset turned off, activate Bluetooth pairing mode by sliding Power switch on. The LED flashes red/blue to indicate pairing mode.

Activate multipoint:

While pressing the Call button, turn on the headset and keep pressing the Call button until LED flashes blue twice. (Repeat to deactivate.)

Pairing new phone/ reconnecting original:

Turn on the headset then press and hold the Call button until the LED flashes red/blue.

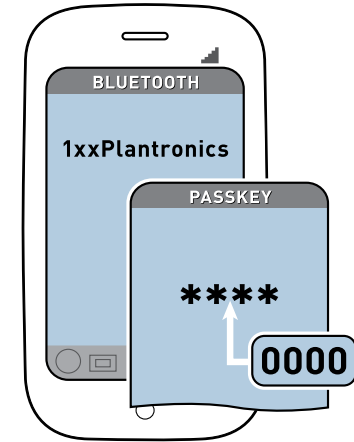

3. CONNECT

Select "1xxPlantronics" from the list of Bluetooth devices shown on your phone.

If phone asks for a passcode, enter four zeros (0000). You may see **** on screen.

Some phones also ask to confirm headset connection after pairing.

Headset LED will stop flashing red/blue once your phone and headset are successfully paired/connected.

"Pairing" connects your headset to your phone.
"Multipoint" lets you use this headset with two phones.
(Activate this feature before pairing your second phone.)


FIND YOUR GROOVE

The loop of the gel eartip tucks into the back curve of your ear for a stable fit.

Try on the headset. The eartip is positioned to suit most people, but you may want to rotate it to best fit your left or right ear.


The gel eartip and speaker click into matching grooves so the eartip doesn't move out of place during use.

The loop on the gel eartip should point away from the headset. (Do not rotate the eartip too far.)

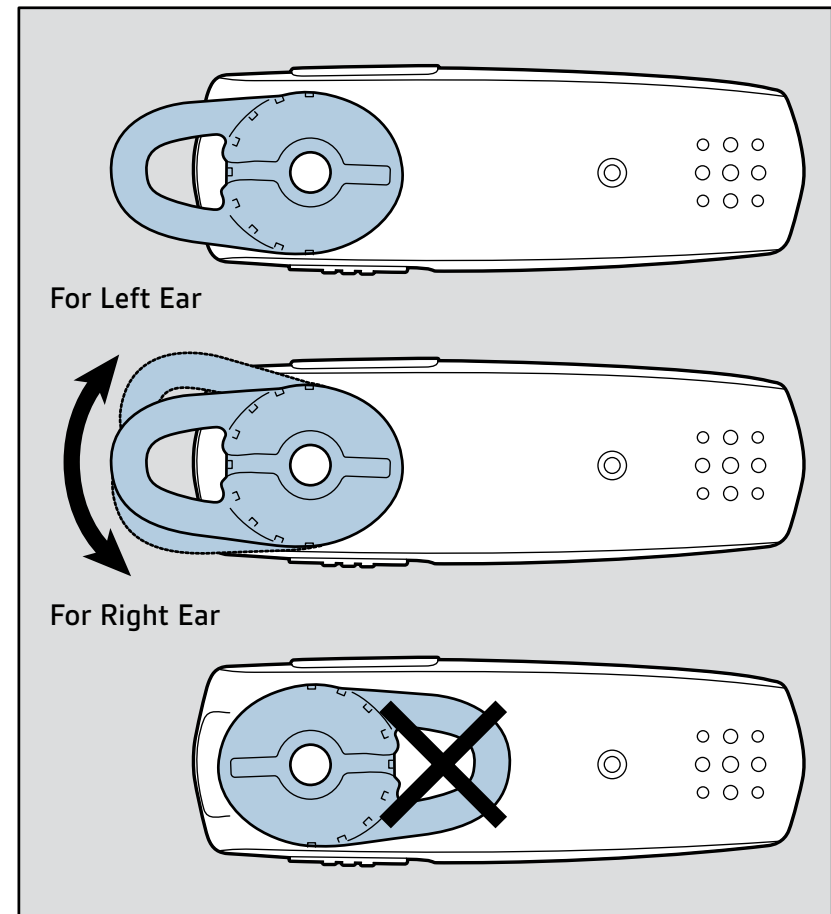


MIX AND MATCH FOR BEST FIT


If the gel eartip feels loose or tight in your ear, then change it. To replace the medium gel eartip for small or large, pull the loop of the gel eartip to remove it. (Don't pull on the speaker base and stem.)

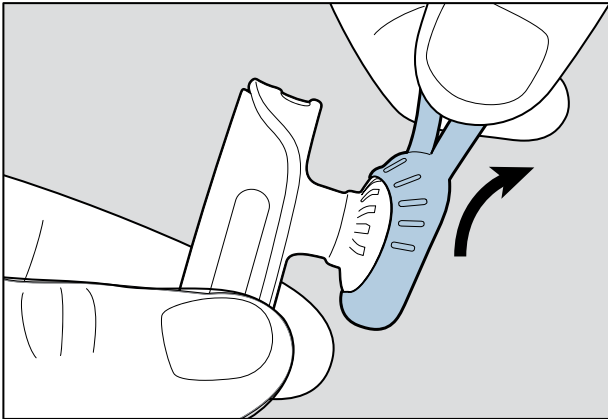

Using your thumb, tuck the bottom of the eartip over the speaker and pull the loop of the eartip over the speaker. (Don't push the speaker through the gel eartip.)

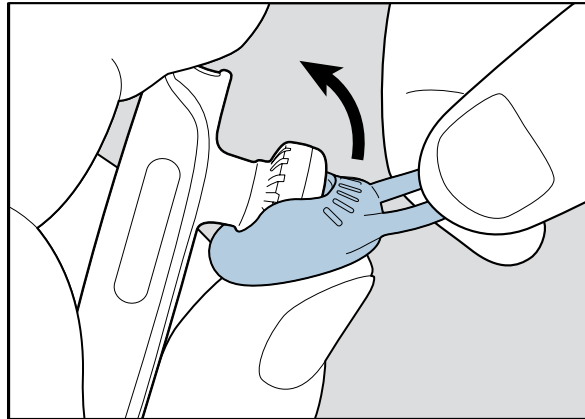

If you aren't familiar with this style of gel eartip, clip on the earloop to the stem for extra stability.

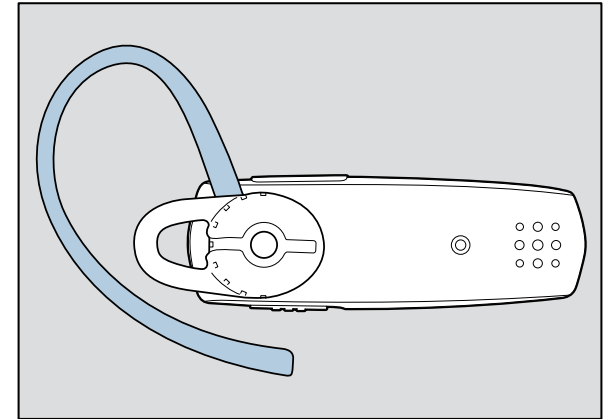

VIDEO TUTORIAL (in English only):
www.plantronics.com/M100fit

MORE ABOUT MULTIPOINT

Plantronics M100 supports multipoint technology, which allows you to use one headset with two different Bluetooth mobile phones.

To pair your headset to a second phone, see "[Connect to your phone.](#)"

How to initiate a call

When multipoint is on, the headset initiates or redials a call from the phone that last made an outgoing call.

To use the second paired phone instead, make the call using the controls on that phone. The second phone activates its link with the headset.

NOTE: The headset cannot place a current call on hold while answering a call from the second phone.

How to answer a call while talking on the other paired phone

To answer a second call on the other phone, the current call must be terminated or transferred back to the first phone. To transfer the call, see "Take a good look."

If you choose not to answer, the second call will go to voice mail.

Answering an incoming call from the second phone, while already on another call:

1. Before answering the second call, end the first call by tapping the Call button.
2. Answer the second call by tapping the Call button again.

TIP To avoid issues with Multipoint, use the Call button on the headset rather than your phone controls.

LISTEN TO THE VOICE

This headset whispers various status alerts when you power on/off, run low on talk time, or lose/reconnect the Bluetooth connection to your phone.

WHAT YOU'LL HEAR	WHEN YOU'LL HEAR IT
Power on	After sliding the Power switch to "on" position
Power off	After sliding the Power switch to "off" position
Talk time: (5 hrs, 4 hrs, 3 hrs, 2 hrs, 1 hr)	After sliding the Power switch to "on" position
Battery low	When you have approximately 30 minutes left before the battery must be recharged
Recharge headset	When you have approximately 15 minutes left before the battery must be recharged
Phone 1 connected	After sliding the Power switch to "on" position or reconnecting a dropped Bluetooth connection
Phone 2 connected	After pairing a second phone using multipoint feature
Pairing	While the headset and phone are trying to pair/connect
Pairing successful	After the headset and phone are successfully paired/connected
Pairing incomplete, restart headset	After the headset and phone tried to pair but failed
Volume maximum	When the highest volume level is reached after tapping Volume button
Mute on	After pressing Volume button for 1 second during a call
Mute off	When on mute, after pressing Volume button for 1 second
Lost connection	When the phone loses the Bluetooth connection with the headset
Multipoint on	After activating the feature by pressing Call button while sliding the Power switch to "on" position
Multipoint off	After deactivating the feature by pressing Call button while sliding the Power switch to "off" position

TIPS

Pair/connect just once

Pairing is a one-time process unless your phone loses the connection or you want to pair a new phone.

Watch for flashing red LED

This headset will visually warn you when your battery is low and needs to be recharged.

Continue a call without the headset

If you need to continue a call without using your headset, just press the Call button for 1 second and the call transfers back to your phone. You will hear a tone to confirm the transfer.

Stay near your phone:

Bluetooth has a working “range” of up to 10 meters (33 feet) between the phone and headset before audio degrades and the connection is lost.

Know how to reconnect:

Your headset tries to reconnect a lost connection. If it can't, then tap the Call button once or manually reconnect via the phone's Bluetooth device menu.


Reset if you cannot reconnect

If your headset was working but now won't connect, remember that newer phones are like small computers, so they may become corrupt over time and you may need to reset them every so often.

Simply turn your phone off and remove the battery for a few seconds, then replace the battery and turn it back on again. If this does not resolve the issue, delete the pairing information for your M100 headset and pair it with your phone again.

Sound your best:

For best voice pickup, always check that the headset points towards the corner of your mouth.

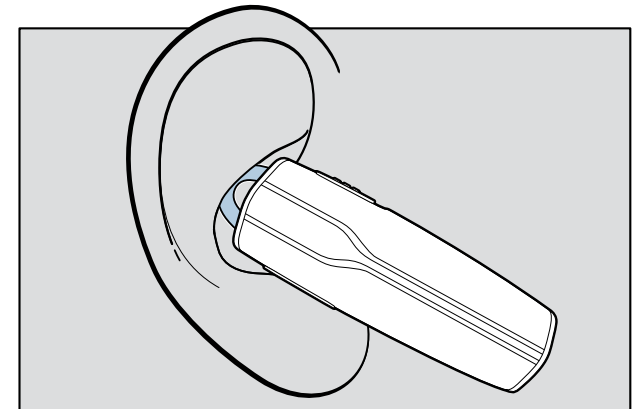

SPECIFICATIONS

Talk time	Up to 6 hours
Standby time	Up to 10 days
Operating distance (range)	Up to 10 meters (33 feet), Class II
Headset weight	9 grams
Headset dimensions	55 x 18.5 x 8.1 mm
Charge connector	Micro USB charging
Battery type	Rechargeable non-replaceable lithium ion polymer
Charge time (maximum)	90 minutes for full
Power requirements	5V DC – 180mA
Bluetooth version	2.1 specifications with EDR
Bluetooth profiles	Hands-free (HFP) Profile 1.5 and Headset (HSP) Profile 1.1
Operating temperature	0 - 40°C (32°F - 104°F)
Storage temperature	0 - 40°C (32°F - 104°F)
Charging temperature	0 - 40°C (32°F - 104°F)

NEED MORE HELP?

en

Plantronics Ltd
Wootton Bassett, UK
Tel: 0800 410014

ar

منطقة الشرق الأوسط
لمزيد من المعلومات:
www.plantronics.com

cs

Czech Republic
www.plantronics.com

da

Danmark
Tel: 80 88 46 10

de

Plantronics GmbH
Hürth, Deutschland
Kundenservice:
Deutschland 0800 9323 400
Österreich 0800 242 500
Schweiz 0800 932 340

el

Για περισσότερες
πληροφορίες:
www.plantronics.com

es

Plantronics Iberia, S.L.
Madrid, España
Tel: 902 41 51 91

fi

Finland
Tel: 0800 117095

fr

Plantronics Sarl
Noisy-le-Grand
France
Tel: 0800 945770

ga

Plantronics BV
Regus House
Harcourt Centre
Harcourt Road
Dublin 2, Ireland
Service ROI: 1800 551 896

he

למידע נוסף, בקר באתר:
www.plantronics.com

hu

További információk:
www.plantronics.com

it

Plantronics Acoustics
Italia Srl, Milano, Italia
Numero Verde: 800 950934

nl

Plantronics B.V.
Hoofddorp, Nederland
NL 0800 7526876
BE 0800 39202
LUX 800 24870

no

Norge
Tel: 80011336

pl

Aby uzyskać więcej informacji:
www.plantronics.com

pt

Portugal
Tel: 0800 84 45 17

ro

Pentru informații
www.plantronics.com

ru

Дополнительная
информация:
www.plantronics.com

sv

Sverige
Tel: 0200 21 46 81

tr

Daha fazla bilgi için:
www.plantronics.com

NEED MORE HELP?

Safety information:

see the separate “For Your Safety” booklet

FAQs:

www.plantronics.com/M100faq

2-year limited warranty details:

www.plantronics.com/warranty

Plantronics B.V.
Scorpius 140
2132 LR Hoofddorp
Netherlands
www.plantronics.com

© 2010 Plantronics, Inc. All Rights Reserved. Bluetooth is a registered trademark of Bluetooth SIG, Inc. and any use by Plantronics is under license. All other trademarks are the property of their respective owners. Patents US 5,712,453; Patents Pending AM84466-03 (09/10)



AE11

EEE Yönetmeliğine Uygundur